

S-saddle 16

Prese a staffa | Clamp saddles | Colliers de prise | Tomas abrazaderas



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE



Pres a staffa	Clamp saddle	Collier de prise	Toma abrazadera
Corpo [PP]	Body [PP]	Corp [PP]	Cuerpo [PP]
Inserto antirotazione [POM]	Anti-rotation insert [POM]	Insert anti-rotation [POM]	Injerto antirotaciòn [POM]
Guarnizione [NBR]	Gasket [NBR]	Joint [NBR]	Junta [NBR]
Viti, dadi, rondelle [Acciaio zincato]	Bolts, nut, washers [Galvanized steel]	Boulons, vis et rondelles [Acier galvanisé]	Tornillos, tuercas, arandelas [Acero galvanizado]
Anello inox di rinforzo [INOX]	Reinforcing ring [INOX]	Bague de renforce [INOX]	Anillo de refuerzo [INOX]





CODE: 0150

S-saddle 16


Pres a staffa

Clamp saddle



Collier de prise

Toma abrazadera

Female threads



ISO 7/1 Parallel

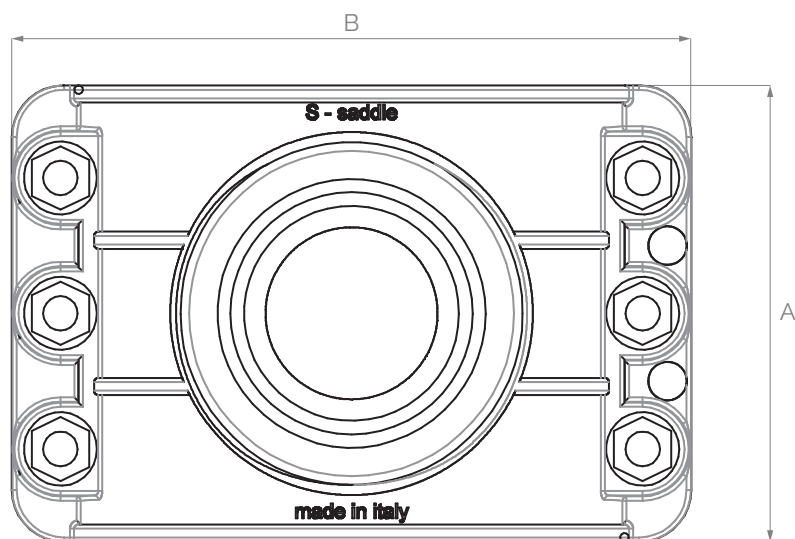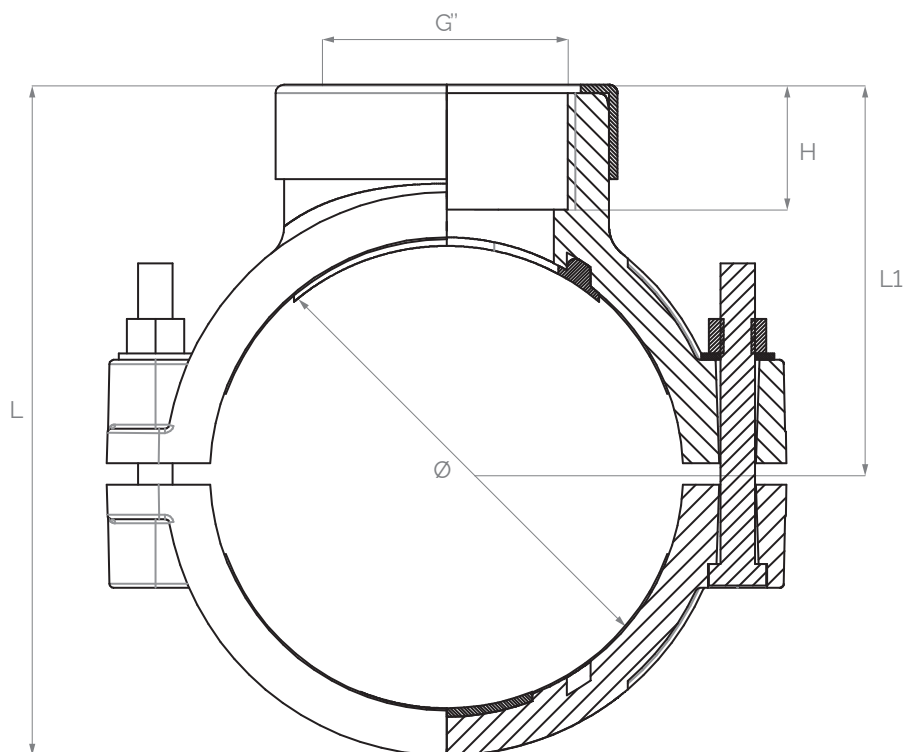

* guarnizione a sella da Ø63 | flat gasket from Ø63 | joint plat à partir de Ø63 | junta con base desde Ø63

** rondelle da Ø63 | washers from Ø63 | rondelles à partir de Ø63 | arandelas desde Ø63

Normative | Standards | Normes | Normas: **ISO 13460** | **AS/NZS4129** | **UNI EN 10226-1 (ISO7/1)**



CODE: 0150

S-saddle 16


Pres a staffa

Clamp saddle

Collier de prise

Toma abrazadera

Female threads



ISO 7/1 Parallel



Code	Size (mm)	PN	BOLTS	Dimensions (mm)					Weight
Code	ØxD"	bar	n°	A	B	H	L	L1	gr
5571103	25 x ½"	16	2	41,0	75,0	14,7	53,0	31,3	79
5571104	25 x ¾"	16	2	41,0	75,0	15,4	53,8	31,9	85
5571105	32 x ½"	16	2	50,8	81,0	14,5	60,1	34,0	91
5571106	32 x ¾"	16	2	50,8	81,0	15,2	60,5	34,6	95
5571107	32 x 1"	16	2	50,8	81,0	18,0	63,7	37,3	105
5571108	40 x ½"	16	2	50,8	83,8	14,5	69,8	37,6	108
5571109	40 x ¾"	16	2	50,8	83,5	15,0	71,5	38,3	112
5571110	40 x 1"	16	2	50,8	83,5	17,9	74,0	40,9	119
5571111	50 x ½"	16	4	55,4	90,5	14,5	79,9	42,1	174
5571112	50 x ¾"	16	4	55,4	90,5	15,6	80,8	43,3	181
5571113	50 x 1"	16	4	55,4	91,1	17,8	83,1	46,0	188
5571114	63 x ½"	16	4	68,8	103,0	16,8	97,2	50,8	244
5571115	63 x ¾"	16	4	68,8	103,0	19,3	99,9	53,6	249
5571116	63 x 1"	16	4	68,8	103,6	21,2	101,4	55,3	253
5571117	63 x 1¼"	16	4	68,8	103,6	21,5	101,6	55,5	262
5571118	63 x 1½"	16	4	74,7	106,8	24,2	107,7	60,0	313
5571119	75 x ½"	16	4	76,8	119,3	15,9	108,9	55,0	289
5571120	75 x ¾"	16	4	76,8	119,3	16,3	110,3	55,4	292
5571121	75 x 1"	16	4	76,8	119,3	21,2	114,0	60,4	300
5571122	75 x 1¼"	16	4	76,8	119,3	21,5	114,1	61,0	305
5571123	75 x 1½"	16	4	86,0	123,0	24,0	122,9	66,8	379
5571124	75 x 2"	16	4	86,0	123,0	27,2	123,3	68,5	390
5571125	90 x ½"	16	4	91,8	137,1	18,6	131,3	67,2	416
5571126	90 x ¾"	16	4	91,8	137,1	19,7	133,0	69,5	422
5571127	90 x 1"	16	4	91,8	137,1	22,8	134,9	71,1	426
5571128	90 x 1¼"	16	4	91,8	138,8	23,0	136,2	73,3	437
5571129	90 x 1½"	16	4	91,8	138,8	24,0	137,7	75,0	450
5571130	90 x 2"	16	4	91,8	138,8	27,2	139,1	76,2	458
5571131	110 x ½"	16	4	105,8	158,0	18,6	151,2	78,3	585

* guarnizione a sella da Ø63 | flat gasket from Ø63 | joint plat à partir de Ø63 | junta con base desde Ø63

** rondelle da Ø63 | washers from Ø63 | rondelles à partir de Ø63 | arandelas desde Ø63

Normative | Standards | Normes | Normas: ISO 13460 | AS/NZS4129 | UNI EN 10226-1 (ISO7/1)



CODE: 0150

S-saddle 16


Pres a staffa

Clamp saddle

Collier de prise

Toma abrazadera

Female threads



ISO 7/1 Parallel



Code	Size (mm)	PN	BOLTS	Dimensions (mm)					Weight
Code	ØxD"	bar	n°	A	B	H	L	L1	gr
5571132	110 x ¾"	16	6	105,8	158,0	19,3	153,0	79,7	595
5571133	110 x 1"	16	6	105,8	158,0	22,1	153,1	80,3	617
5571134	110 x 1¼"	16	6	105,8	158,0	23,6	156,0	83,8	604
5571135	110 x 1½"	16	6	105,8	158,0	24,1	157,9	85,2	624
5571136	110 x 2"	16	6	105,8	158,0	26,9	159,3	86,4	632
5571137	110 x 3"	10	6	120,0	158,0	34,4	166,3	90,9	698
5571138	125 x ¾"	16	6	119,4	181,0	19,3	174,5	89,6	746
5571139	125 x 1"	16	6	119,4	181,0	21,8	177,4	91,6	753
5571140	125 x 1¼"	16	6	119,4	181,0	23,0	178,8	93,0	761
5571141	125 x 1½"	16	6	119,4	181,0	24,1	179,0	94,5	776
5571142	125 x 2"	16	6	119,4	181,0	27,1	179,7	96,8	785
5571143	125 x 3"	10	6	120,0	185,7	34,4	186,7	101,3	851
5571144	140 x ¾"	16	6	126,3	225,0	20,0	190,4	100,0	942
5571145	140 x 1"	16	6	126,3	225,0	21,5	191,0	101,2	952
5571146	140 x 1¼"	16	6	126,3	225,0	23,2	192,5	102,9	964
5571147	140 x 1½"	16	6	126,3	225,0	24,0	195,6	105,2	990
5571148	140 x 2"	16	6	126,3	225,0	27,1	197,3	107,9	999
5571149	140 x 3"	10	6	126,3	225,8	34,8	201,7	110,8	1066
5571150	160 x ½"	16	6	129,3	228,0	19,1	206,2	108,4	1065
5571151	160 x ¾"	16	6	129,3	228,0	19,6	212,5	109,7	1073
5571152	160 x 1"	16	6	129,3	228,0	21,9	214,7	111,4	1079
5571102	160 x 1¼"	16	6	129,3	228,0	23,0	216,5	112,2	1087
5570925	160 x 1½"	16	6	129,3	229,2	24,0	216,7	113,5	1119
5570926	160 x 2"	16	6	129,3	229,2	27,2	219,0	115,5	1128
5570927	160 x 3"	10	6	129,3	229,2	34,8	222,5	121,1	1192

* guarnizione a sella da Ø63 | flat gasket from Ø63 | joint plat à partir de Ø63 | junta con base desde Ø63

** rondelle da Ø63 | washers from Ø63 | rondelles à partir de Ø63 | arandelas desde Ø63

Normative | Standards | Normes | Normas: ISO 13460 | AS/NZS4129 | UNI EN 10226-1 (ISO7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811

info@divisionenergy.com - www.divisionenergy.com