

-  Giunto antivibrante filettato - PN16
-  Threaded rubber flexible vibration-free joint - PN16
-  Gummi-Kompensator Gewindeanschlüsse - PN16
-  Manchon double onde taraudé - PN16
-  Резьбовая антивибрационная вставка - PN16



N	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	EPDM	Vulcanizzato Vulcanized
2	Raccordo - Union	Acciaio al carbonio Carbon steel	Zincato Zinc plated
3	Dado - Nut	Acciaio al carbonio Carbon steel	Zincato Zinc plated
4	Raccordo - Union	Acciaio al carbonio Carbon steel	Zincato Zinc plated

Size




3/4" - 3"

16 bar




UNI EN 10226-1



Max
+100° C

Min
0° C

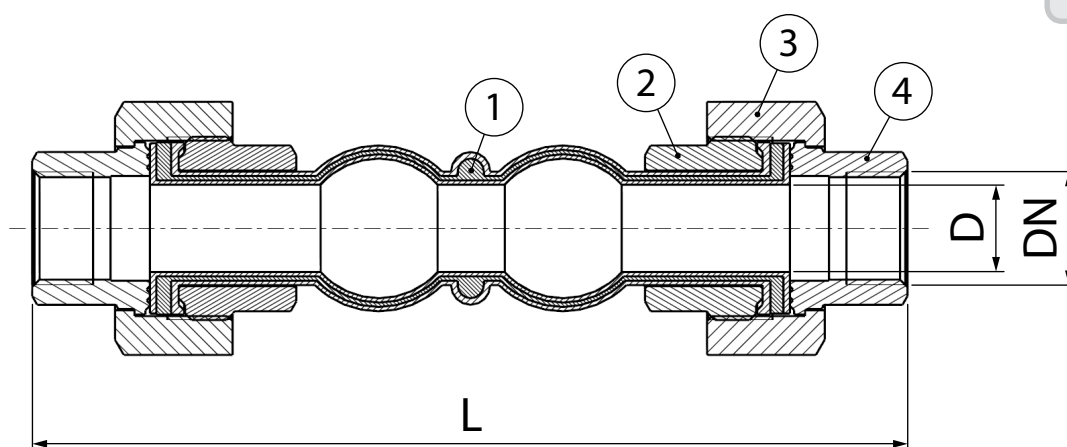

DIMENSIONI - DIMENSIONS (mm)

	DN	D	L	C1	C2	A
0365884	3/4"	20	203	6	22	32
0365885	1"	25	203	6	22	25
0365886	1"1/4	32	203	6	22	25
0365887	1"1/2	40	203	6	22	20
0365888	2"	50	203	6	22	15
0365889	2"1/2	65	265	6	22	12
0365890	3"	80	285	6	22	10

C1= Estensione assiale - Axial extension

C2= Compressione assiale - Axial compression

A= Flessione angolare - Angular movement