

Qrystal **N8**

Full Black Mono-Crystalline 450W

0~+5W POWER TOLERANCE

High efficiency N - type Double glass black grid solar module ●

Stronger properties, PID resistance, reduced hot spot loss ●

Better temperature coefficient ●

Harsh environmental adaptation ●

Full black module, aesthetic appearance ●

Bifacial module, more power generation ●

25 years material warranty 

30 years power linear warranty 

108

HALF-CUT
CELLS

182
x188
mm

RECTANGULAR
CELLS



*Subject to the terms and conditions contained in the applicable Q-SUN solar Limited Warranty Statement.
25-year limited product warranty is available only for products installed and operating on rooftops in certain regions.

22.5%
MAXIMUM CONVERSION

0~+5W
POWER TOLERANCE

0.4%
0.4% PER YEAR OVER 30 YEARS

Half-Cut Module
LOWER TEMPERATURE COEFFICIENT

Specification


Cell Type	Mono Crystalline 16BB
No. of Cells	108 [2x(6x9)] pcs
Dimension	1762×1134×30mm
Weight	25.0kg±3%
Front Glass	2.0mm
Back Glass	2.0mm
Frame	Black Anodized Aluminum Alloy
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

Packing Standard

36pcs/pallet

40HQ: 26 pallets/container, 936pcs/container

Mechanical Diagrams

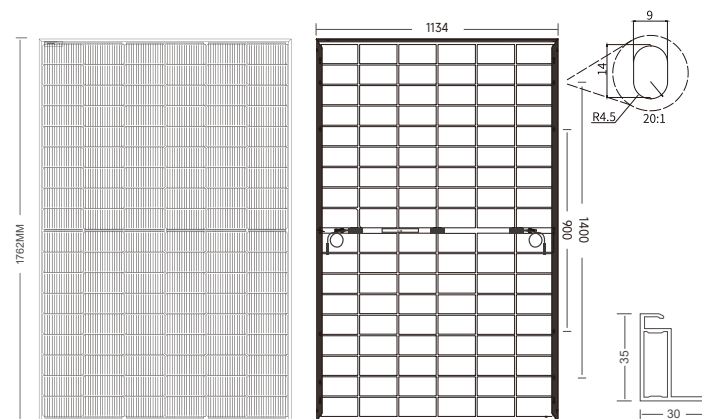

Length: ±2mm Width: ±2mm Thickness: ±1mm Hole pitch: ±2mm

Electrical Parameters

Module Type	QN-450HT-05	
	STC	NOCT
Peak Power-Pmax (W)	450	340
Open Circuit Voltage-Voc (V)	39.98	37.98
Short Circuit Current-Isc (A)	14.25	11.40
Maximum Power Voltage-Vmp(V)	33.23	31.40
Maximum Power Current-mp(A)	13.54	10.83
Module Efficiency - nm(%)	22.5	

Electrical Parameters At BNPI

Maximum Power-Pmax(W)	496
Open Circuit Voltage-Voc (V)	39.98
Short Circuit Current-Isc135 (A)	15.71
Maximum Power Voltage-Vmp (V)	33.23
Maximum Power Current-Imp (A)	14.93
Short Circuit Current-Isc300 (A)	17.49

Operating Parameters



Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	42±2°C
Operational Temperature	-45°C~+85°C
Safety Class	Class II

Temperature Coefficient (STC Test)

Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Load Capacity

Max Load Front	5400Pa
Max Load Back	2400Pa
Through Hail Testing	25mm Diameter, Impact Speed 23m/s

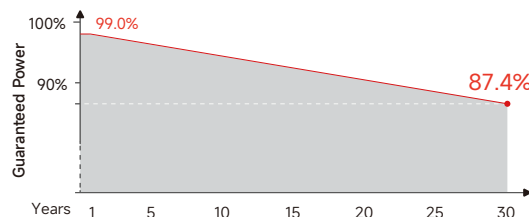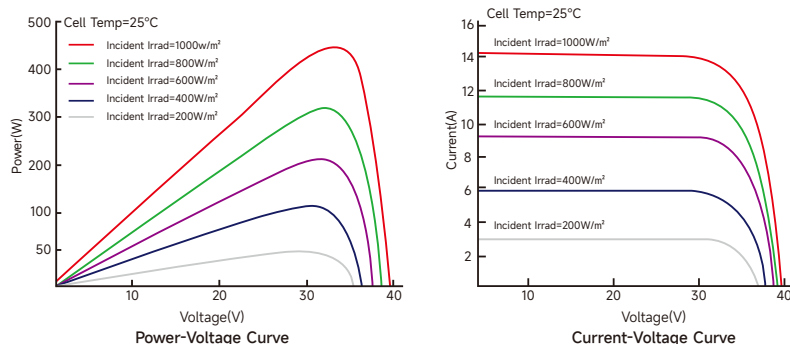

STC : Irradiance:1000W/m² | Battery temperature: 25°C | Atmospheric=1.5

NOCT: Irradiance:800W/m² | Ambien temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/s

BNPI: Rear Irradiance 135W/m² | Bifaciality coefficient 80%±5%