



Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica



**Gomito a 90°
filettato femmina**

**90° female
elbow**

**Coude à 90°
taraudé**

**Codo a 90°
hembra**

Ghiera **[PP]**

Anello di
aggraffaggio **[POM]**

Anello
Blueseal **[PP]**

Guarnizione
Blueseal **[NBR]**

Corpo **[PP]**

Nut **[PP]**

Grip
ring **[POM]**

Spacer ring
Blueseal **[PP]**

Gasket
Blueseal **[NBR]**

Body **[PP]**

Ecrou **[PP]**

Bague
d'agrafage **[POM]**

Douille de
poussée **[PP]**

Joint
Blueseal **[NBR]**

Corp **[PP]**

Tuerca **[PP]**

Cono de
fijación **[POM]**

Anillo prensa
juntal **[PP]**

Junta
Blueseal **[NBR]**

Cuerpo **[PP]**



CODE: B 125

Blueseal16

Gomito a 90° filettato femmina


90° female elbow

Coude à 90° taraudé


Codo a 90° hembra



Female threads



ISO 7/1 Parallel

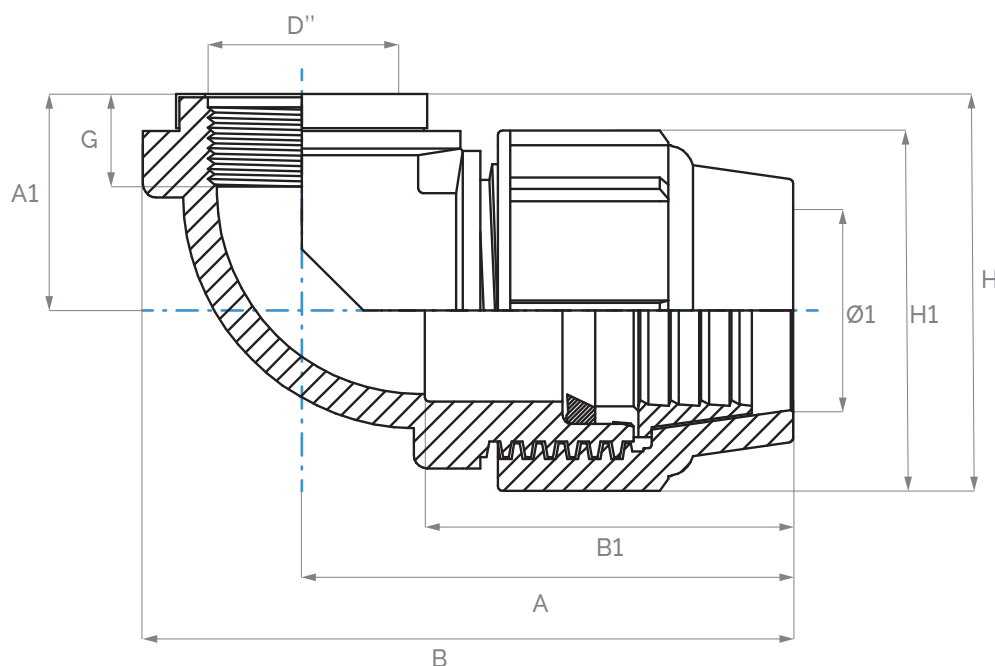

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø1 x D''	bar	B	H	B1	H1	G	A	A1	gr
5570960	16 x ½"	16	73	54	46	49	18	57,5	29,5	32
5570961	16 x ¾"	16	75	59	46	49	19	56,5	34,5	36
5570962	20 x ½"	16	89	60	50	47	14	69,0	36,5	50
5570963	20 x ¾"	16	89	67	50	47	18	68,5	43,5	55
5570964	25 x ½"	16	95	66	53	54	15	75,0	39,0	64
5570965	25 x ¾"	16	95	66	53	54	19	72,5	39,0	66
5570966	25 x 1"	16	95	74	53	54	20	72,5	47,0	74
5570967	32 x ½"	16	106	76	63	65	15	87,0	43,5	100
5570968	32 x ¾"	16	109	78	63	65	19	86,1	45,5	105
5570969	32 x 1"	16	113	80	63	65	19	85,5	47,5	113
5570970	32 x 1¼"	16	113	82	63	65	20	85,0	49,5	140
5570971	40 x 1"	16	140	101	72	83	22	111,0	59,5	198
5570972	40 x 1¼"	16	145	103	74	83	23	109,0	61,5	223

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)



Gomito a 90° filettato femmina


90° female elbow

Coude à 90° taraudé


Codo a 90° hembra



Female threads



ISO 7/1 Parallel

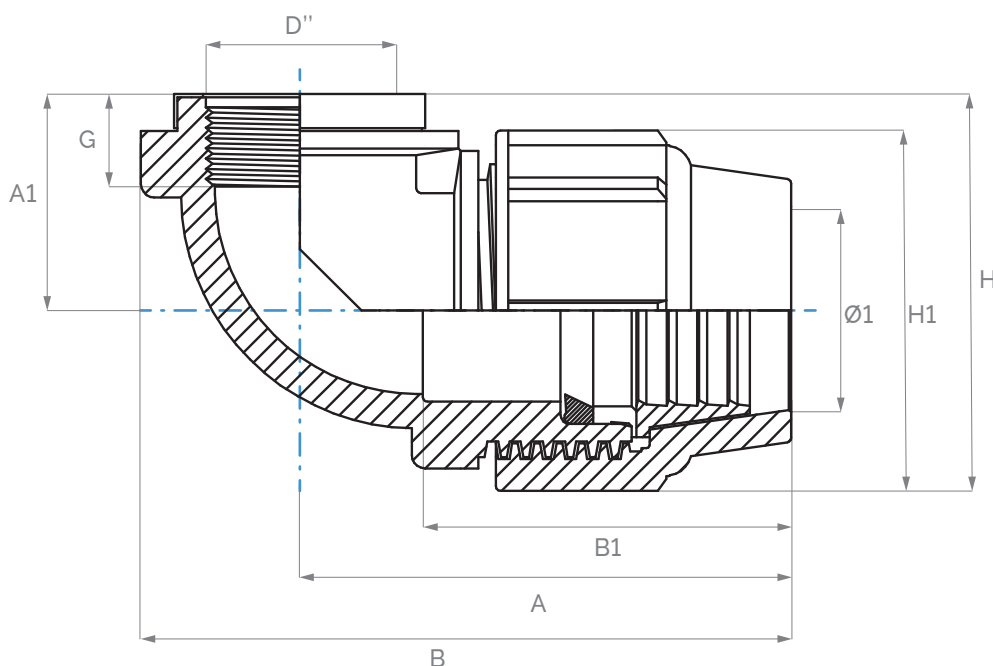

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø1 x D''	bar	B	H	B1	H1	G	A	A1	gr
5570973	40 x 1"½	16	140	106	72	83	24	104,0	64,5	250
5570974	50 x 1"¾	16	156	119	85	97	24	124,0	70,5	300
5570975	50 x 1"½	16	163	118	85	97	25	124,0	69,5	334
5570976	50 x 2"	16	159	121	85	97	25	117,5	72,5	377
5570977	63 x 1"½	16	193	135	106	114	25	153,5	78,0	524
5570978	63 x 2"	16	198	138	106	114	28	153,0	81,0	550
5570979	63 x 2"½	10	193	143	106	114	29	144,0	86,0	648
5570980	75 x 2"½	10	225	146	120	133	29	168,0	79,5	855
5570981	75 x 3"	10	225	170	120	133	33	167,5	103,5	940
5570982	90 x 3"	10	264	178	145	154	33	198,0	101,0	1337
5570983	90 x 4"	10	263	206	145	154	38	196,0	129,0	1407
5570984	110 x 4"	10	333	218	184	188	38	256,0	124,0	2110

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811

info@divisionenergy.com - www.divisionenergy.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE
B 130



**Gomito a 90°
filettato maschio**

**90° male
elbow**

**Coude à 90°
fileté male**

**Codo a 90°
macho**

Ghiera **[PP]**
Anello di
aggraffaggio **[POM]**
Anello
Blueseal **[PP]**
Guarnizione
Blueseal **[NBR]**
Corpo **[PP]**

Nut **[PP]**
Grip
ring **[POM]**
Spacer ring
Blueseal **[PP]**
Gasket
Blueseal **[NBR]**
Body **[PP]**

Ecrou **[PP]**
Bague
d'agrafage **[POM]**
Douille de
poussée **[PP]**
Joint
Blueseal **[NBR]**
Corp **[PP]**

Tuerca **[PP]**
Cono de
fijación **[POM]**
Anillo prensa
juntal **[PP]**
Junta
Blueseal **[NBR]**
Cuerpo **[PP]**



Gomito a 90° filettato maschio

90° male elbow


Coude à 90° fileté male

Codo a 90° macho




Male threads

tapered 1:16



ISO 7/1 Conical

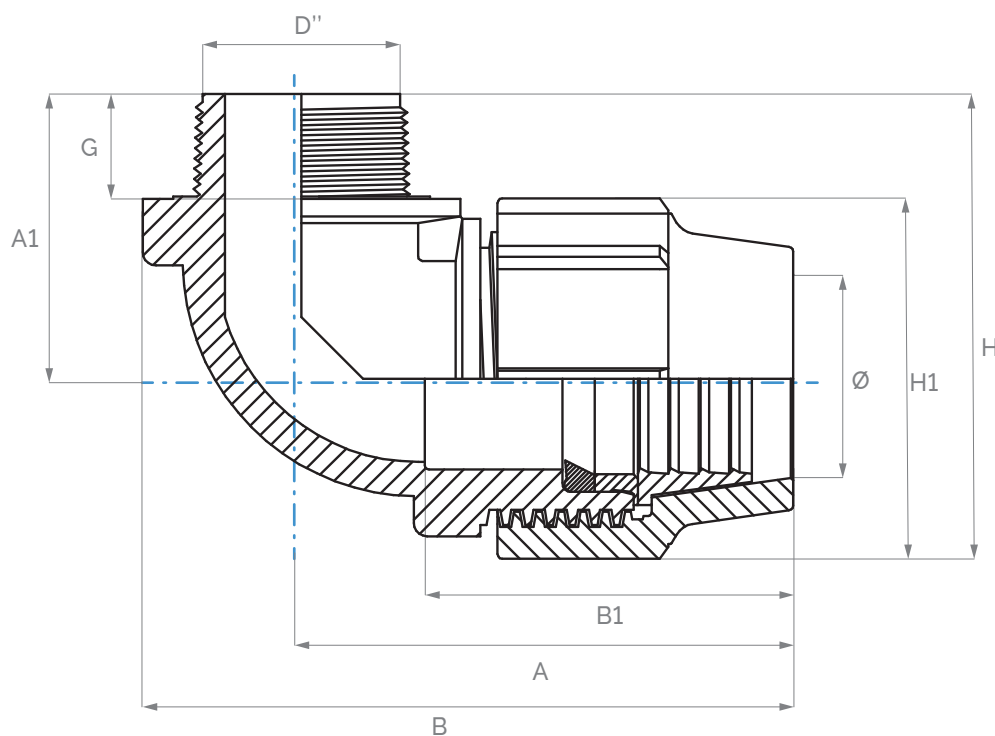

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø x D''	bar	B	H	B1	H1	G	A	A1	gr
5570960	16 x ½"	16	73	52	46	49	15	57,5	27,5	29
5570961	16 x ¾"	16	73	55	47	49	16	57,5	30,5	29
5570962	20 x ½"	16	84	62	50	47	14	68,0	38,5	45
5570963	20 x ¾"	16	88	65	50	47	16	68,0	41,5	49
5570964	25 x ½"	16	90	70	53	54	14	73,5	43,0	61
5570965	25 x ¾"	16	92	71	53	54	16	72,0	44,0	62
5570966	25 x 1"	16	95	74	53	54	19	78,2	47,0	68
5570967	32 x ½"	16	105	80	63	65	15	94,5	47,5	102
5570968	32 x ¾"	16	105	81	63	65	16	87,0	48,5	100
5570969	32 x 1"	16	108	85	63	65	19	85,5	52,5	106
5570970	32 x 1¼"	16	113	86	63	65	21	85,0	53,5	131
5570971	40 x 1"	16	138	105	72	83	19	109,0	63,5	206
5570972	40 x 1¼"	16	139	108	74	83	22	110,0	66,5	201



CODE: B 130

Blueseal16

Gomito a 90° filettato maschio

90° male elbow


Coude à 90° fileté male

Codo a 90° macho




Male threads

tapered 1:16



ISO 7/1 Conical

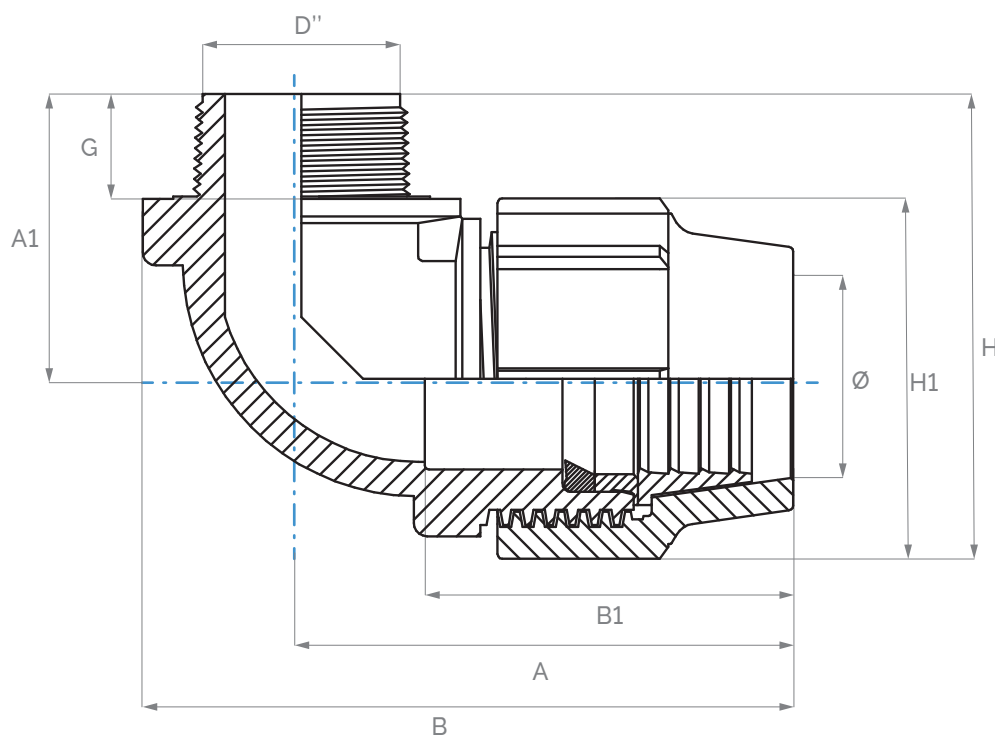

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø x D''	bar	B	H	B1	H1	G	A	A1	gr
5570973	40 x 1½"	16	138	103	72	83	22	103,0	61,5	223
5570974	50 x 1¾"	16	156	122	85	97	22	124,0	73,5	305
5570975	50 x 1½"	16	156	122	85	97	22	124,0	73,5	301
5570976	50 x 2"	16	160	121	85	97	26	119,0	72,5	354
5570977	63 x 1½"	16	192	140	107	114	22	152,0	83,0	520
5570978	63 x 2"	16	192	145	107	114	27	152,0	88,0	507
5570979	63 x 2½"	16	193	143	108	114	29	144,0	86,0	601
5570980	75 x 2½"	16	225	164	122	133	30	168,5	97,5	900
5570981	75 x 3"	16	224	169	120	133	33	112,0	102,5	873
5570982	90 x 3"	16	266	196	146	154	33	200,0	119,0	1406
5570983	90 x 4"	16	266	196	146	154	38	200,0	119,0	1310
5570984	110 x 4"	16	319	222	188	184	38	242,5	130,0	2253

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811

info@divisionenergy.com - www.divisionenergy.com

sabsipa.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE
B 120



Gomito a 90°

90° elbow

Coude à 90°

Codo a 90°

Ghiera **[PP]**
Anello di
aggraffaggio **[POM]**
Anello
Blueseal **[PP]**
Guarnizione
Blueseal **[NBR]**
Corpo **[PP]**

Nut **[PP]**
Grip
ring **[POM]**
Spacer ring
Blueseal **[PP]**
Gasket
Blueseal **[NBR]**
Body **[PP]**

Ecrou **[PP]**
Bague
d'agrafage **[POM]**
Douille de
poussée **[PP]**
Joint
Blueseal **[NBR]**
Corp **[PP]**

Tuerca **[PP]**
Cono de
fijación **[POM]**
Anillo prensa
juntal **[PP]**
Junta
Blueseal **[NBR]**
Cuerpo **[PP]**




Gomito a 90°

90° elbow

Coude à 90°

Codo a 90°

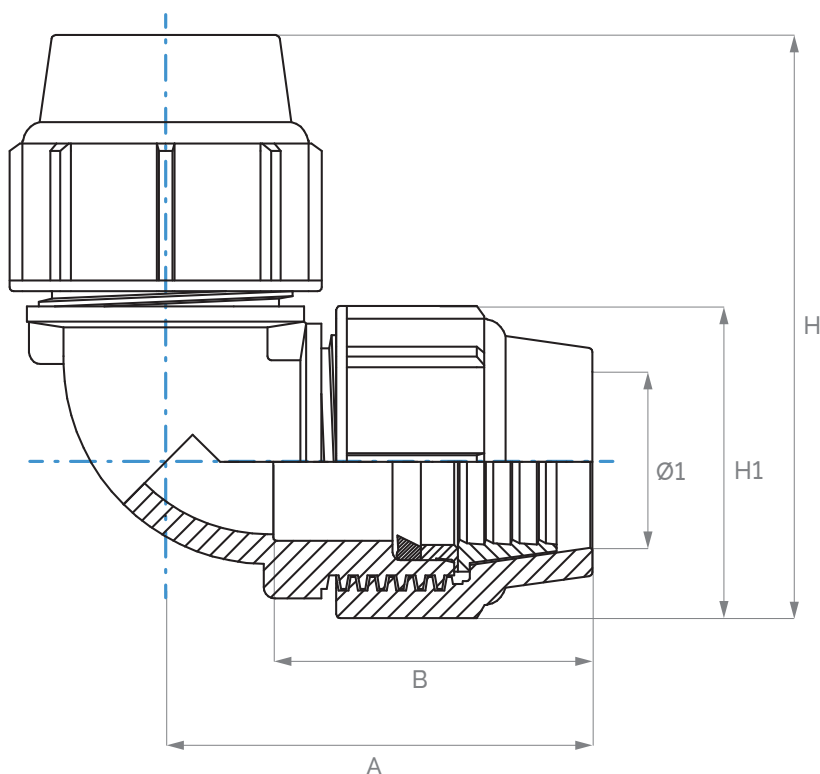

Code	Size (mm)	PN	Dimensions (mm)				Weight
Code	Ø	bar	B	H	H1	A	gr
5570950	16	16	47	76	49	51,5	45
5570951	20	16	50	91	47	67,5	78
5570952	25	16	52	99	54	72,0	101
5570953	32	16	62	119	65	86,5	175
5570954	40	16	73	150	83	108,5	340
5570955	50	16	85	173	97	124,5	508
5570956	63	16	107	207	114	150,0	834
5570957	75	16	120	235	133	168,5	127
5570958	90	16	145	278	154	201,0	1963
5570959	110	16	189	334	184	242,0	3250

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811
info@divisionenergy.com - www.divisionenergy.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE
B 105



Manicotto

Ghiera **[PP]**
Anello di
aggraffaggio **[POM]**
Anello
Blueseal **[PP]**
Guarnizione
Blueseal **[NBR]**
Corpo **[PP]**

Coupling

Nut **[PP]**
Grip
ring **[POM]**
Spacer ring
Blueseal **[PP]**
Gasket
Blueseal **[NBR]**
Body **[PP]**

Manchon

Ecrou **[PP]**
Bague
d'agrafage **[POM]**
Douille de
poussée **[PP]**
Joint
Blueseal **[NBR]**
Corp **[PP]**


Manguito

Tuerca **[PP]**
Cono de
fijación **[POM]**
Anillo prensa
juntal **[PP]**
Junta
Blueseal **[NBR]**
Cuerpo **[PP]**



Manicotto

Coupling
Manchon
Manguito

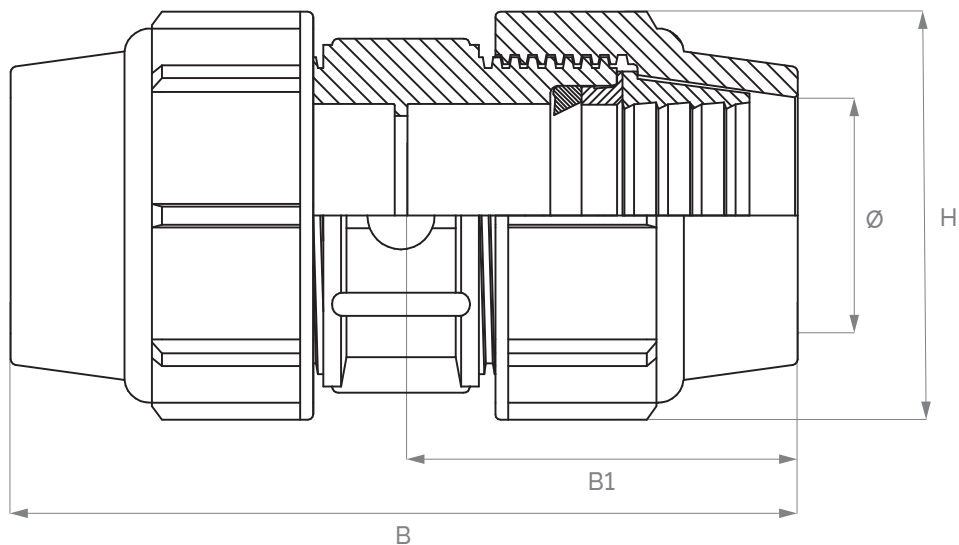

Code	Size (mm)	PN	Dimensions (mm)			Weight
Code	Ø	bar	B	H	B1	gr
5570930	16	16	92	39	45	43
5570931	20	16	103	47	50	71
5570932	25	16	105	54	51	93
5570933	32	16	124	65	60	158
5570934	40	16	147	83	71	284
5570935	50	16	177	97	88	450
5570936	63	16	220	114	108	740
5570937	75	16	242	133	118	1098
5570938	90	16	281	154	134	1685
5570939	110	16	362	184	171	2782

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811
info@divisionenergy.com - www.divisionenergy.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica



Raccordo femmina	Female adaptor	Raccord taraudé	Empalme hembra
Ghiera [PP]	Nut [PP]	Ecrou [PP]	Tuerca [PP]
Anello di aggraffaggio [POM]	Grip ring [POM]	Bague d'agrafage [POM]	Cono de fijación [POM]
Anello Blueseal [PP]	Spacer ring Blueseal [PP]	Douille de poussée [PP]	Anillo prensa juntal [PP]
Guarnizione Blueseal [NBR]	Gasket Blueseal [NBR]	Joint Blueseal [NBR]	Junta Blueseal [NBR]
Corpo [PP]	Body [PP]	Corp [PP]	Cuerpo [PP]




Raccordo femmina


Female adaptor
Raccord taraudé
Empalme hembra



Female threads



ISO 7/1 Parallel

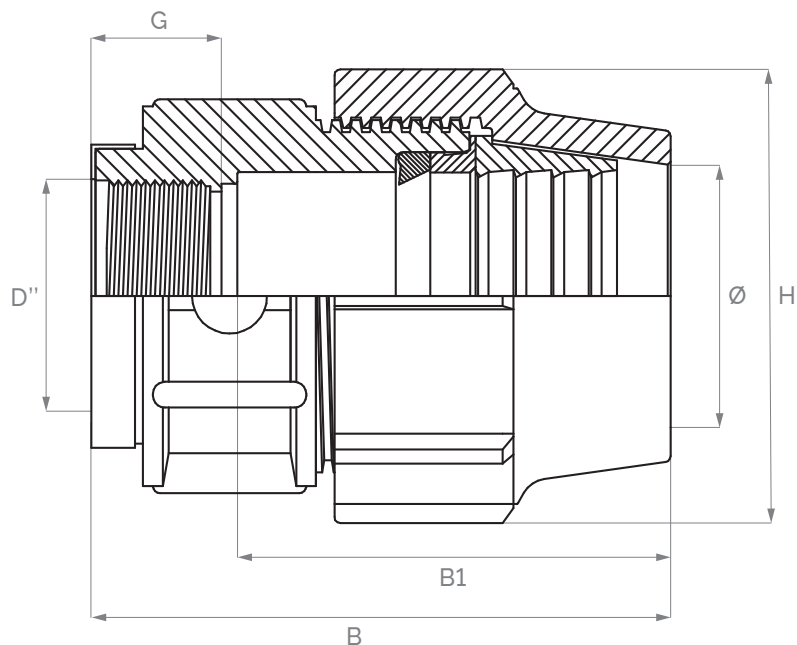

Code	Size (mm)	PN	Dimensions (mm)				Weight
Code	Ø x D''	bar	B	H	B1	G	gr
5571072	16 x ½"	16	68	39	48	15	30
5571073	16 x ¾"	16	73	39	48	19	33
5571074	20 x ½"	16	74	47	56	15	45
5571075	20 x ¾"	16	82	47	63	19	51
5571076	25 x ½"	16	75	54	60	15	56
5571077	25 x ¾"	16	82	54	60	22	62
5571078	25 x 1"	16	82	54	60	20	65
5571079	32 x ½"	16	85	65	68	12	92
5571080	32 x ¾"	16	85	65	68	19	94
5571081	32 x 1"	16	86	65	63	20	96
5571082	32 x 1¼"	16	95	65	63	22	106
5571083	40 x 1"	16	97	83	72	19	166
5571084	40 x 1¼"	16	100	83	72	22	168
5571085	40 x 1½"	16	109	83	72	23	198
5571086	50 x 1¼"	16	117	97	89	24	280

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)



CODE: B 100

Blueseal16

Raccordo femmina


Female adaptor

Raccord taraudé


Empalme hembra



Female threads



ISO 7/1 Parallel

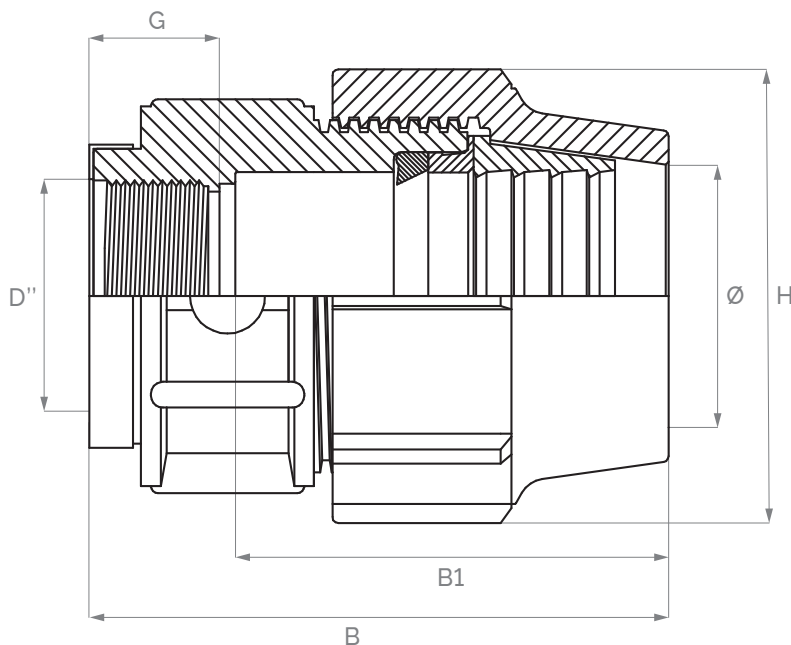

Code	Size (mm)	PN	Dimensions (mm)				Weight
Code	Ø x D''	bar	B	H	B1	G	gr
5571087	50 x 1½"	16	117	97	86	23	286
5571088	50 x 2"	16	131	97	86	25	309
5571089	63 x 1½"	16	142	114	121	23	467
5571090	63 x 2"	16	142	114	113	26	463
5571091	63 x 2½"	16	163	114	108	28	257
5571092	75 x 2"	10	154	133	120	25	674
5571093	75 x 2½"	10	154	133	118	28	661
5571094	75 x 3"	10	178	133	120	33	746
5571095	90 x 2"	10	178	154	147	26	1010
5571096	90 x 2½"	10	184	154	147	31	1030
5571097	90 x 3"	10	188	154	147	33	1020
5571098	90 x 4"	10	205	154	147	38	1122
5571099	110 x 2"	10	231	184	186	28	1640
5571100	110 x 3"	10	225	184	186	33	1643
5571101	110 x 4"	10	234	184	187	38	1650

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811
info@divisionenergy.com - www.divisionenergy.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica



Raccordo maschio	Male adaptor	Raccord fileté male	Empalme macho
Ghiera [PP]	Nut [PP]	Ecrou [PP]	Tuerca [PP]
Anello di aggraffaggio [POM]	Grip ring [POM]	Bague d'agrafage [POM]	Cono de fijación [POM]
Anello Blueseal [PP]	Spacer ring Blueseal [PP]	Douille de poussée [PP]	Anillo prensa juntal [PP]
Guarnizione Blueseal [NBR]	Gasket Blueseal [NBR]	Joint Blueseal [NBR]	Junta Blueseal [NBR]
Corpo [PP]	Body [PP]	Corp [PP]	Cuerpo [PP]



Raccordo maschio

Male adaptor


Raccord fileté male

Empalme macho




Male threads

tapered 1:16



ISO 7/1 Conical

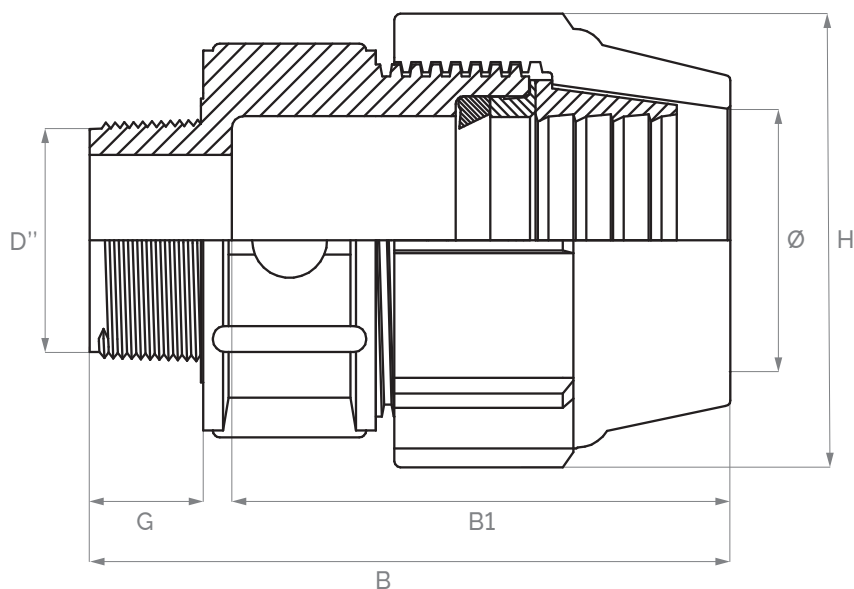

Code	Size (mm)	PN	Dimensions (mm)				Weight
Code	Ø x D''	bar	B	H	B1	G	gr
5571037	16 x ½"	16	69	39	48	15	27
5571038	16 x ¾"	16	71	39	48	17	28
5571039	20 x ½"	16	76	47	57	15	43
5571040	20 x ¾"	16	77	47	57	17	44
5571041	20 x 1"	16	81	47	57	20	46
5571042	25 x ½"	16	77	54	58	15	56
5571043	25 x ¾"	16	79	54	58	17	57
5571044	25 x 1"	16	82	54	58	20	58
5571045	32 x ½"	16	86	65	68	15	90
5571046	32 x ¾"	16	88	65	68	17	91
5571047	32 x 1"	16	92	65	68	20	94
5571048	32 x 1" ¼	16	94	65	68	22	97
5571049	32 x 1" ½	16	92	65	68	21	100
5571050	40 x 1"	16	102	83	78	20	164
5571051	40 x 1" ¼	16	105	83	78	22	168
5571052	40 x 1" ½	16	105	83	78	21	168
5571053	40 x 2"	16	126	83	92	26	211
5571054	50 x 1"	16	126	97	96	20	280

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811

info@divisionenergy.com - www.divisionenergy.com



Raccordo maschio

Male adaptor


Raccord fileté male

Empalme macho




Male threads

tapered 1:16



ISO 7/1 Conical

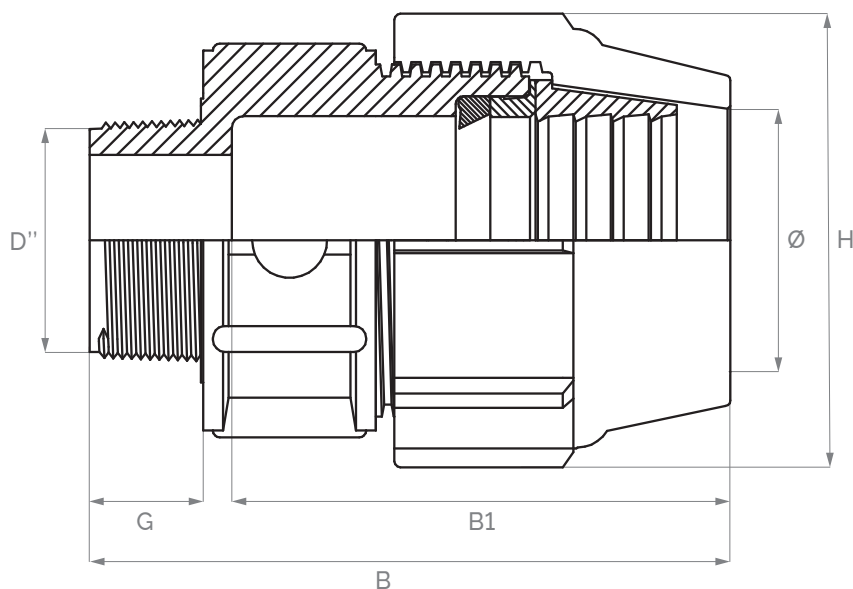

Code	Size (mm)	PN	Dimensions (mm)				Weight
Code	Ø x D''	bar	B	H	B1	G	gr
5571055	50 x 1" ¼	16	128	97	96	22	280
5571056	50 x 1" ½	16	128	97	96	21	282
5571057	50 x 2"	16	134	97	97	26	292
5571058	63 x 1" ¼	16	153	114	121	22	453
5571059	63 x 1" ½	16	153	114	121	21	457
5571060	63 x 2"	16	157	114	121	26	463
5571061	63 x 2" ½	16	161	114	121	30	477
5571062	75 x 2"	16	169	133	134	26	667
5571063	75 x 2" ½	16	173	133	134	30	676
5571064	75 x 3"	16	177	133	134	33	680
5571065	90 x 2"	16	188	154	147	26	1018
5571066	90 x 2" ½	16	192	154	147	30	1020
5571067	90 x 3"	16	194	154	147	33	1040
5571068	90 x 4"	16	201	154	147	39	1070
5571069	110 x 2"	16	241	184	186	39	1650
5571070	110 x 3"	16	234	184	186	33	1654
5571071	110 x 4"	16	242	184	187	39	1647

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811

info@divisionenergy.com - www.divisionenergy.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica



T a 90° filettato femmina	90° female tee	Té à 90° taraudée	T a 90° hembra
Ghiera [PP] Anello di aggraffaggio [POM] Anello Blueseal [PP] Guarnizione Blueseal [NBR] Corpo [PP]	Nut [PP] Grip ring [POM] Spacer ring Blueseal [PP] Gasket Blueseal [NBR] Body [PP]	Ecrou [PP] Bague d'agrafage [POM] Douille de poussée [PP] Joint Blueseal [NBR] Corp [PP]	Tuerca [PP] Cono de fijación [POM] Anillo prensa juntal [PP] Junta Blueseal [NBR] Cuerpo [PP]



T a 90° filettato femmina


90° female tee

Té à 90° taraudée


T a 90° hembra



Female threads



ISO 7/1 Parallel

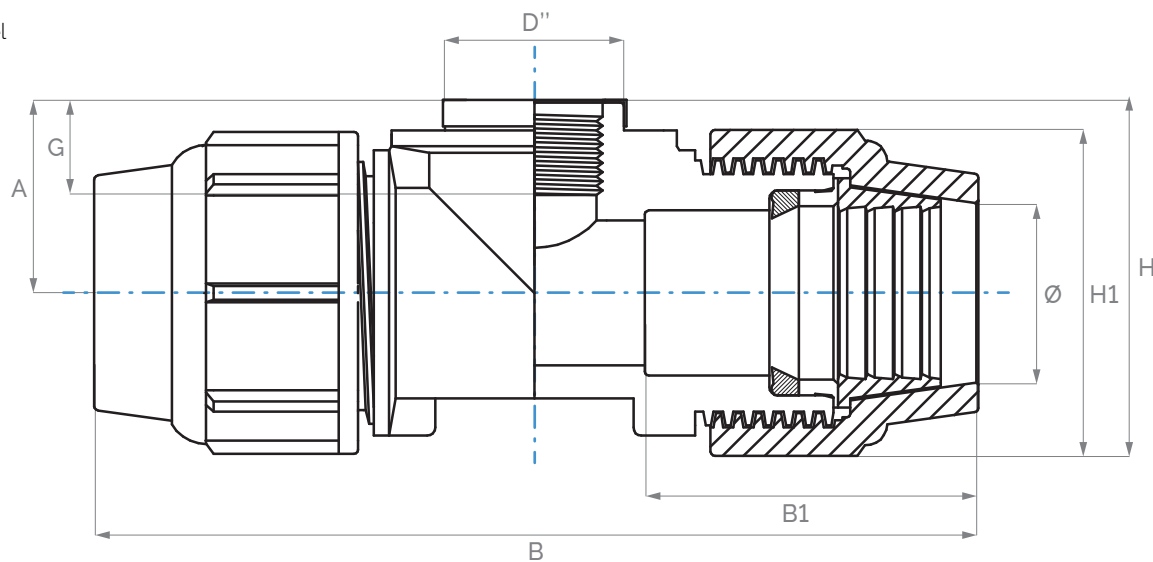

Code	Size (mm)	PN	Dimensions (mm)						Weight
Code	ØxD"xØ	bar	B	H	G	B1	H1	A	gr
5571010	16x½"x16	16	120	57	19	47	39	37,5	54
5571011	16x¾"x16	16	120	60	23	47	39	40,5	57
5571012	20x½"x20	16	142	61	19	56	47	36,5	90
5571013	20x¾"x20	16	142	63	20	56	47	39,5	92
5571014	25x½"x25	16	145	62	19	54	54	35,0	115
5571015	25x¾"x24	16	145	66	23	54	54	39,0	113
5571016	25x1"x25	16	145	80	19	54	54	53,0	124
5571017	32x½"x32	16	175	73	19	66	65	41,5	196
5571018	32x¾"x32	16	175	72	23	66	65	40,5	215
5571019	32x1"x32	16	175	79	23	66	65	46,5	201
5571020	32x1¼"x32	16	175	82	20	66	65	49,5	227
5571021	40x1"x40	16	205	90	19	75	83	48,5	390
5571022	40x1¼"x40	16	205	92	25	75	83	49,5	385
5571023	40x1½"x40	16	205	106	25	75	83	64,5	412

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)



T a 90° filettato femmina


90° female tee

Té à 90° taraudée


T a 90° hembra



Female threads



ISO 7/1 Parallel

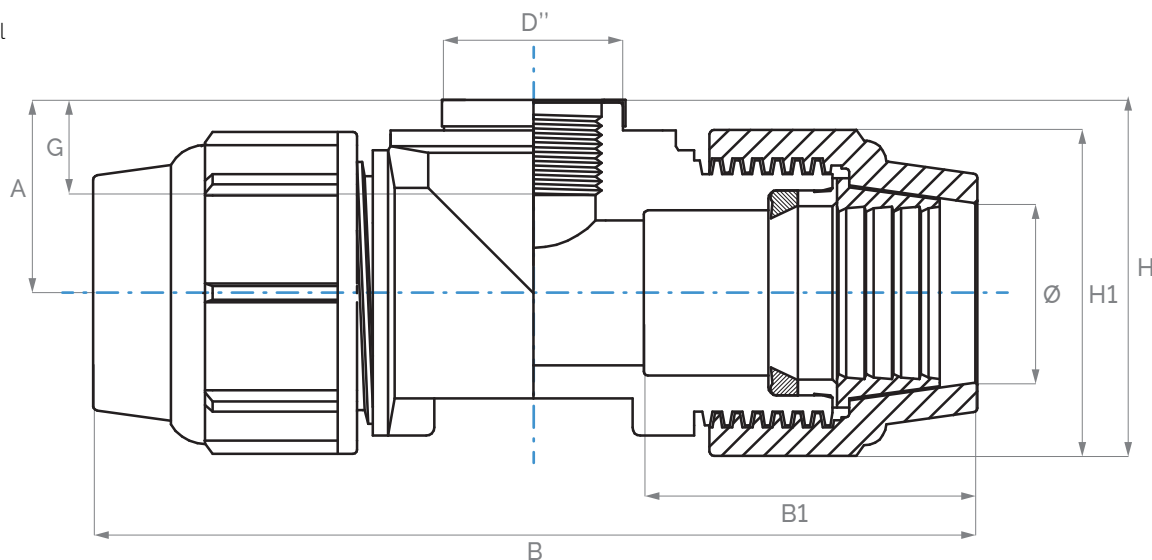

Code	Size (mm)	PN	Dimensions (mm)						Weight
Code	ØxD''xØ	bar	B	H	G	B1	H1	A	gr
5571024	50x1"¼x50	16	236	104	21	85	97	55,5	566
5571025	50x1"½x50	16	236	105	27	85	97	56,5	580
5571026	50x2"x50	16	236	121	25	86	97	72,5	598
5571027	63x1"½x63	16	287	122	25	107	114	65,0	980
5571028	63x2"x63	16	287	122	25	107	114	65,0	980
5571029	63x2"½x63	10	287	143	27	107	114	86,0	1015
5571030	75x2"x75	10	336	143	24	120	133	76,5	1458
5571031	75x2"½x75	10	336	144	32	120	133	77,5	1422
5571032	75x3"x75	10	336	166	33	120	133	81,5	1518
5571033	90x2"½x90	10	402	186	31	145	154	109,0	2247
5571034	90x3"x90	10	402	178	36	145	154	101,0	2238
5571035	110x3"x110	10	498	208	33	189	184	116,0	3650
5571036	110x4"x110	10	498	214	38	189	184	122,0	3545

• Anello di rinforzo (inox AISI 430) da 1" ½ a 4" | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Cervia (RA) Tel. 0544 964311 - Fax 0544 267811

info@divisionenergy.com - www.divisionenergy.com

Raccordi a compressione

Compression fittings

Raccords à compression

Accesorios compresión



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE
B 080



T a 90°

90° tee

Té à 90°

T a 90°

Ghiera **[PP]**
Anello di
aggraffaggio **[POM]**
Anello
Blueseal **[PP]**
Guarnizione
Blueseal **[NBR]**
Corpo **[PP]**

Nut **[PP]**
Grip
ring **[POM]**
Spacer ring
Blueseal **[PP]**
Gasket
Blueseal **[NBR]**
Body **[PP]**


Ecrou **[PP]**
Bague
d'agrafage **[POM]**
Douille de
poussée **[PP]**
Joint
Blueseal **[NBR]**
Corp **[PP]**

Tuerca **[PP]**
Cono de
fijación **[POM]**
Anillo prensa
juntal **[PP]**
Junta
Blueseal **[NBR]**
Cuerpo **[PP]**



T a 90°

90° tee
Té à 90°
T a 90°

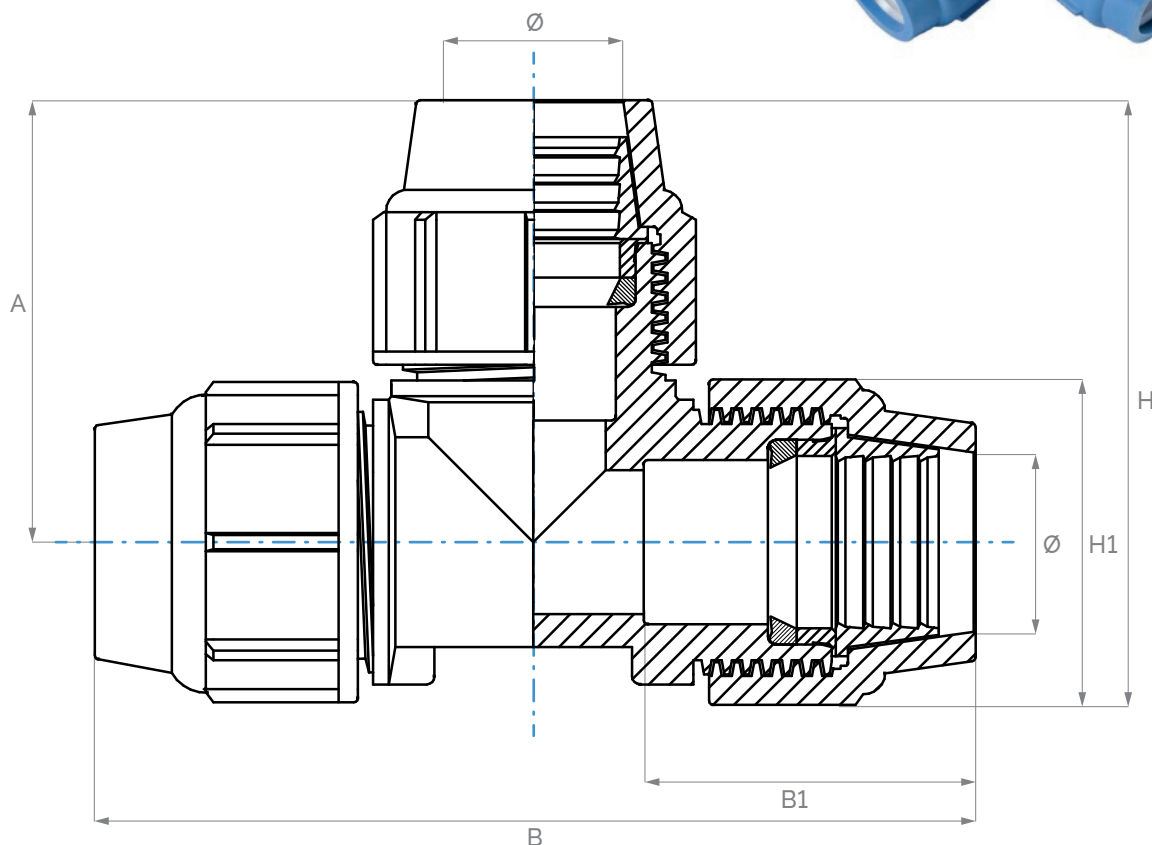

Code	Size (mm)	PN	Dimensions (mm)					Weight
Code	ØxØxØ	bar	B	H	B1	H1	A	gr
5570940	16x16x16	16	120	79	48	39	59,5	67
5570941	20x20x20	16	142	94	54	47	70,5	119
5570942	25x25x25	16	145	99	56	54	72,0	154
5570943	32x32x32	16	175	120	66	65	87,5	267
5570944	40x40x40	16	205	145	75	83	103,5	508
5570945	50x50x50	16	236	160	85	97	111,5	745
5570946	63x63x63	16	289	201	107	114	144,0	1247
5570947	75x75x75	10	336	238	120	133	171,5	1853
5570948	90x90x90x	10	397	272	147	154	195,0	2878
5570949	110x110x110	10	495	336	189	184	244,0	4665

Normative | Standards | Normes | Normas

UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Energy Expert by Idroexpert

Via dell'Industria 15 - 48015 Montaletto di Cervia (RA) Tel. 0544 964311 - Fax 0544 267811
info@divisionenergy.com - www.divisionenergy.com