


 Valvola a sfera a passaggio totale in acciaio inox AISI 316
Attacchi F/F

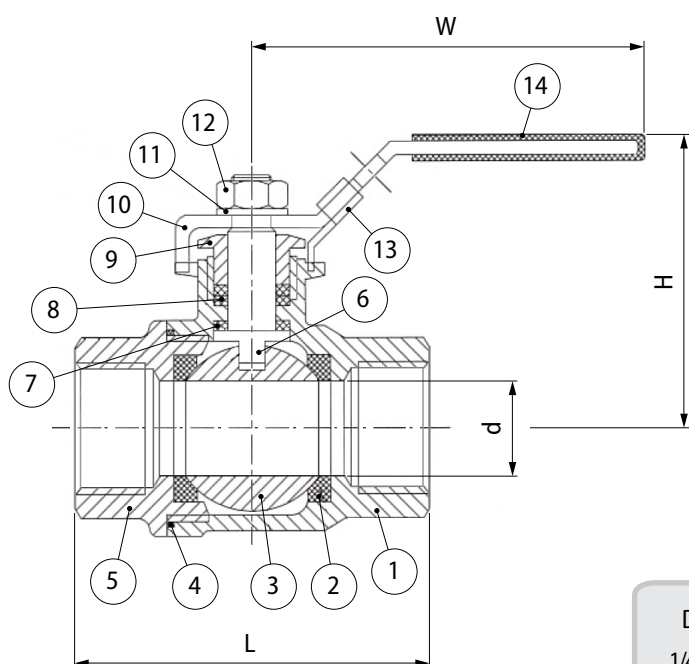


DIMENSIONI - DIMENSIONS (mm)

CODICE	DN	d	L	H	W	N/m	Kgs
0365995	1/4"	11.5	49	54	105	4	0.23
0365996	3/8"	12.5	49	54	105	4	0.23
0365997	1/2"	15	57	56	105	5	0.24
0365998	3/4"	20	64	65	118	8	0.45
0365999	1"	25	77	70	150	10	0.65
0366000	1 1/4"	32	90	75	150	14	1.05
0366001	1 1/2"	40	105	93	182	18	1.70
0366002	2"	50	125	99	182	25	2.61
0366003	2 1/2"	65	153	123	254	48	5.01
0366004	3"	76	172	140	254	75	7.61
0366004	4"	94	221	175	285	110	14.75

DN

1/4" - 1" 84 bar
1 1/4" - 1 1/2" 70 bar
2" - 4" 63 bar



Max
+180°
C Min
+25° C




UNI ISO 228/1
(on request NPT ANSI)

B.1.20.1)



PRESSIONE / TEMPERATURA - PRESSURE / TEMPERATURE

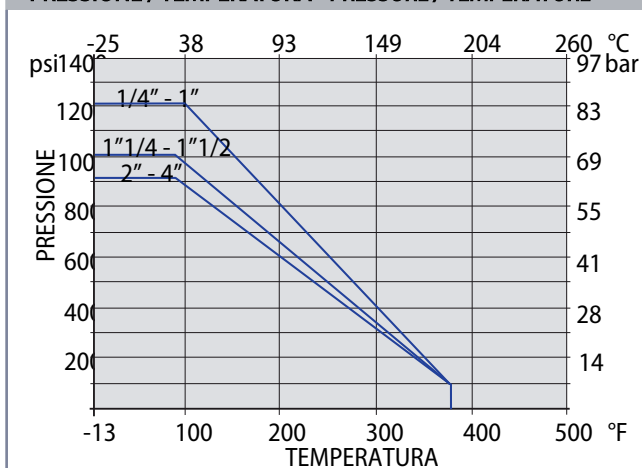

ITEM	PART NAME	MATERIAL	QTY
1	Corpo - Body	CF8M	1
2	Seggio Sfera - Ball Seat	R-PTFE	2
3	Sfera - Ball	(15%) PTFE	1
4	Guarnizione Corpo - Body Gasket	SS316	1
5	Manicotto - Body End	SS316	1
6	Asta - Stem	SS316	1
7	Rondella - Thrust Washer	PTFE	1
8	Guarnizione Asta - Stem Packing	PTFE	1
9	Dado Premistoppa - Gland Nut	SS304	1
10	Leva - Handle	SS304	1
11	Rondella Molla - Spring Washer	SS304	1
12	Dado - Nut	SS304	1
13	Dispositivo di blocco - Lock Device	SS304	1
14	Rivestimento Plastico - Plastic Cover	PLASTIC	1